

Plamann Park Restroom Stall Accessibility

Lake - Men's restroom/changing room Lake Side


- Neutral color such as grey or sand tones, Floor Mounted, head rail braced, HDPE Solid Plastic panel with color continuous throughout panel, door and pilaster partitions.
- Aluminum hardware with wrap around hinges.
- Continuous stainless steel brackets.
- Plastic pilaster shoes.
- Tamper resistant fasteners.

Men's Restroom Stall – ADA -

- Currently there is one ADA stall in the men's restroom, the block walls need to be removed and replace with panels
- Door self-closing hinges and proper hardware
- Pilaster and Pilaster Shoe
- All Hardware to complete the

Men's Changing Room

- There are two changing areas as shown on the picture below to the right, the block walls need to be removed and replace with panels to make one changing stall.
- Door with self-closing hinges and proper hardware
- Pilasters and Pilaster Shoes
- All Hardware to complete the project.

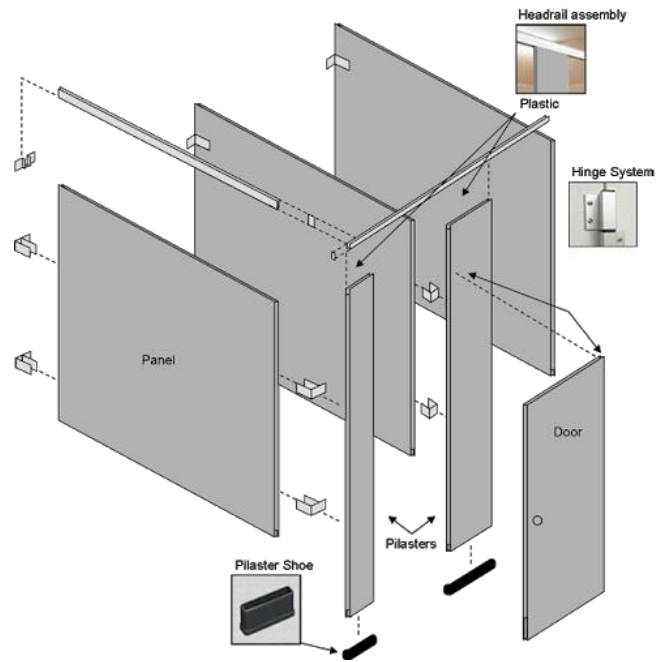

project.





Women's restroom/changing room Lake Side

Women's Restroom Stall – ADA

-

There is one ADA stall as shown in the middle picture on the right side, block walls will be removed and replace with panels

- Door with self-closing hinges and proper hardware
- Pilaster and Pilaster Shoe
- All Hardware and Headrails to complete the project.

Women's Restroom Stall

- There is one other stall
- Door with self-closing hinges and proper hardware
- Pilaster and Pilaster Shoe
- All Hardware and Headrails to complete the project.

Women's Changing Rooms

- Currently there are two changing picture above to the far right, the block walls

- Door with self-closing hinges and proper hardware



stalls in the women's restroom as shown in the need to be removed and replace with

- Pilasters and Pilaster Shoes
- All Hardware to complete the project.

Lake - Men's Public Restrooms at the Lake

- Neutral color, Floor Mounted, head rail braced, HDPE Solid Plastic panel, door and pilaster partitions.
- Aluminum hardware with wrap around hinges.
- Continuous stainless steel brackets.
- Plastic pilaster shoes.
- Tamper resistant fasteners.



Women's public restroom at Lake

- Remove block wall between stalls, Replace with panel.
- ADA Stall - Door with self-closing hinges and proper hardware
- Standard Stall – Door with self-closing hinges and proper hardware
- Pilaster and Pilaster Shoe
- All Hardware to complete the project.

Chris Brandt - Restrooms at Chris Brandt Picnic Shelter

- Replace current hinges with inswing hinge sets and ADA accessible latching hardware in both restrooms.

Small Shelter – Restrooms at the Small Shelter

- Replace current hinges with inswing hinge sets and ADA accessible latching hardware in both restrooms.

Plamann Lake and Mosquito Hill Nature Center ADA Replacement Doors and hardware

Plamann Lake – Guard Room Door

- Replacing current door with flush insulated steel door (prefinished) – painting of door
- Three Full mortise hinges
- Door lever
- Mortise/rim lock - Schlage Primus keyed for our existing “MK” key
- Three Key blank for mortise/rim lock – Schlage Primus “MK” key
- Surface mount closer
- Hold Open closer arm
- 36” mil Sweep
- Latch protector

Mosquito Hill Nature Center

Great Room Doors

- Replace two lock cylinders

Gift Shop Door

- Replace Mortise lock cylinder

Front Doors

- Remove existing handicap switch and replace with jamb switch with text and logo
- Reuse existing narrow switch (inside vestibule to outside doors)