REVISION DATE	R/W PROJECT NUMBER	SHEET NUMBER
	6529-1-00	
	FEDERAL PROJECT NUMBER	

PLAT OF RIGHT OF WAY REQUIRED FOR

FREEDOM VILLAGE STREETS

SCALE 0 100 200 Ft.

DATE November 1, 1978

CONSTRUCTION PROJECT NUMBER

6529-1-71 4

RECEIVED
JAN 20 1994
OUTAGAMIE COUNTY
HIGHWAY DEPT.

SCHEDULE OF LANDS AND INTERESTS REQUIRED

PARCEL NUMBER	OWNER	INTEREST REQUIRED	L.H.E. ACRES		ACRES REQUIRED			TOTAL REMAINING ACRES	OPERATIONS PROJECT NUMBER
			TEMP	PERM.	NEW R/W REQUIRED	EXISTING R/W	TOTAL R/W REQUIRED		
1	MARGARET GARVEY	FEE TITLE			0.364	–	0.364		
2	ANNA RIESE	FEE TITLE			0.004	–	0.004		
3	JOSEPH H. & CLARA GEENEN	FEE TITLE			0.002	–	0.002		
4	BERNARD W. & ELIZABETH MAE SCHUH	FEE TITLE			0.002	–	0.002		
5	RICHARD A. STUCK & WIFE	FEE TITLE			0.002	–	0.002		

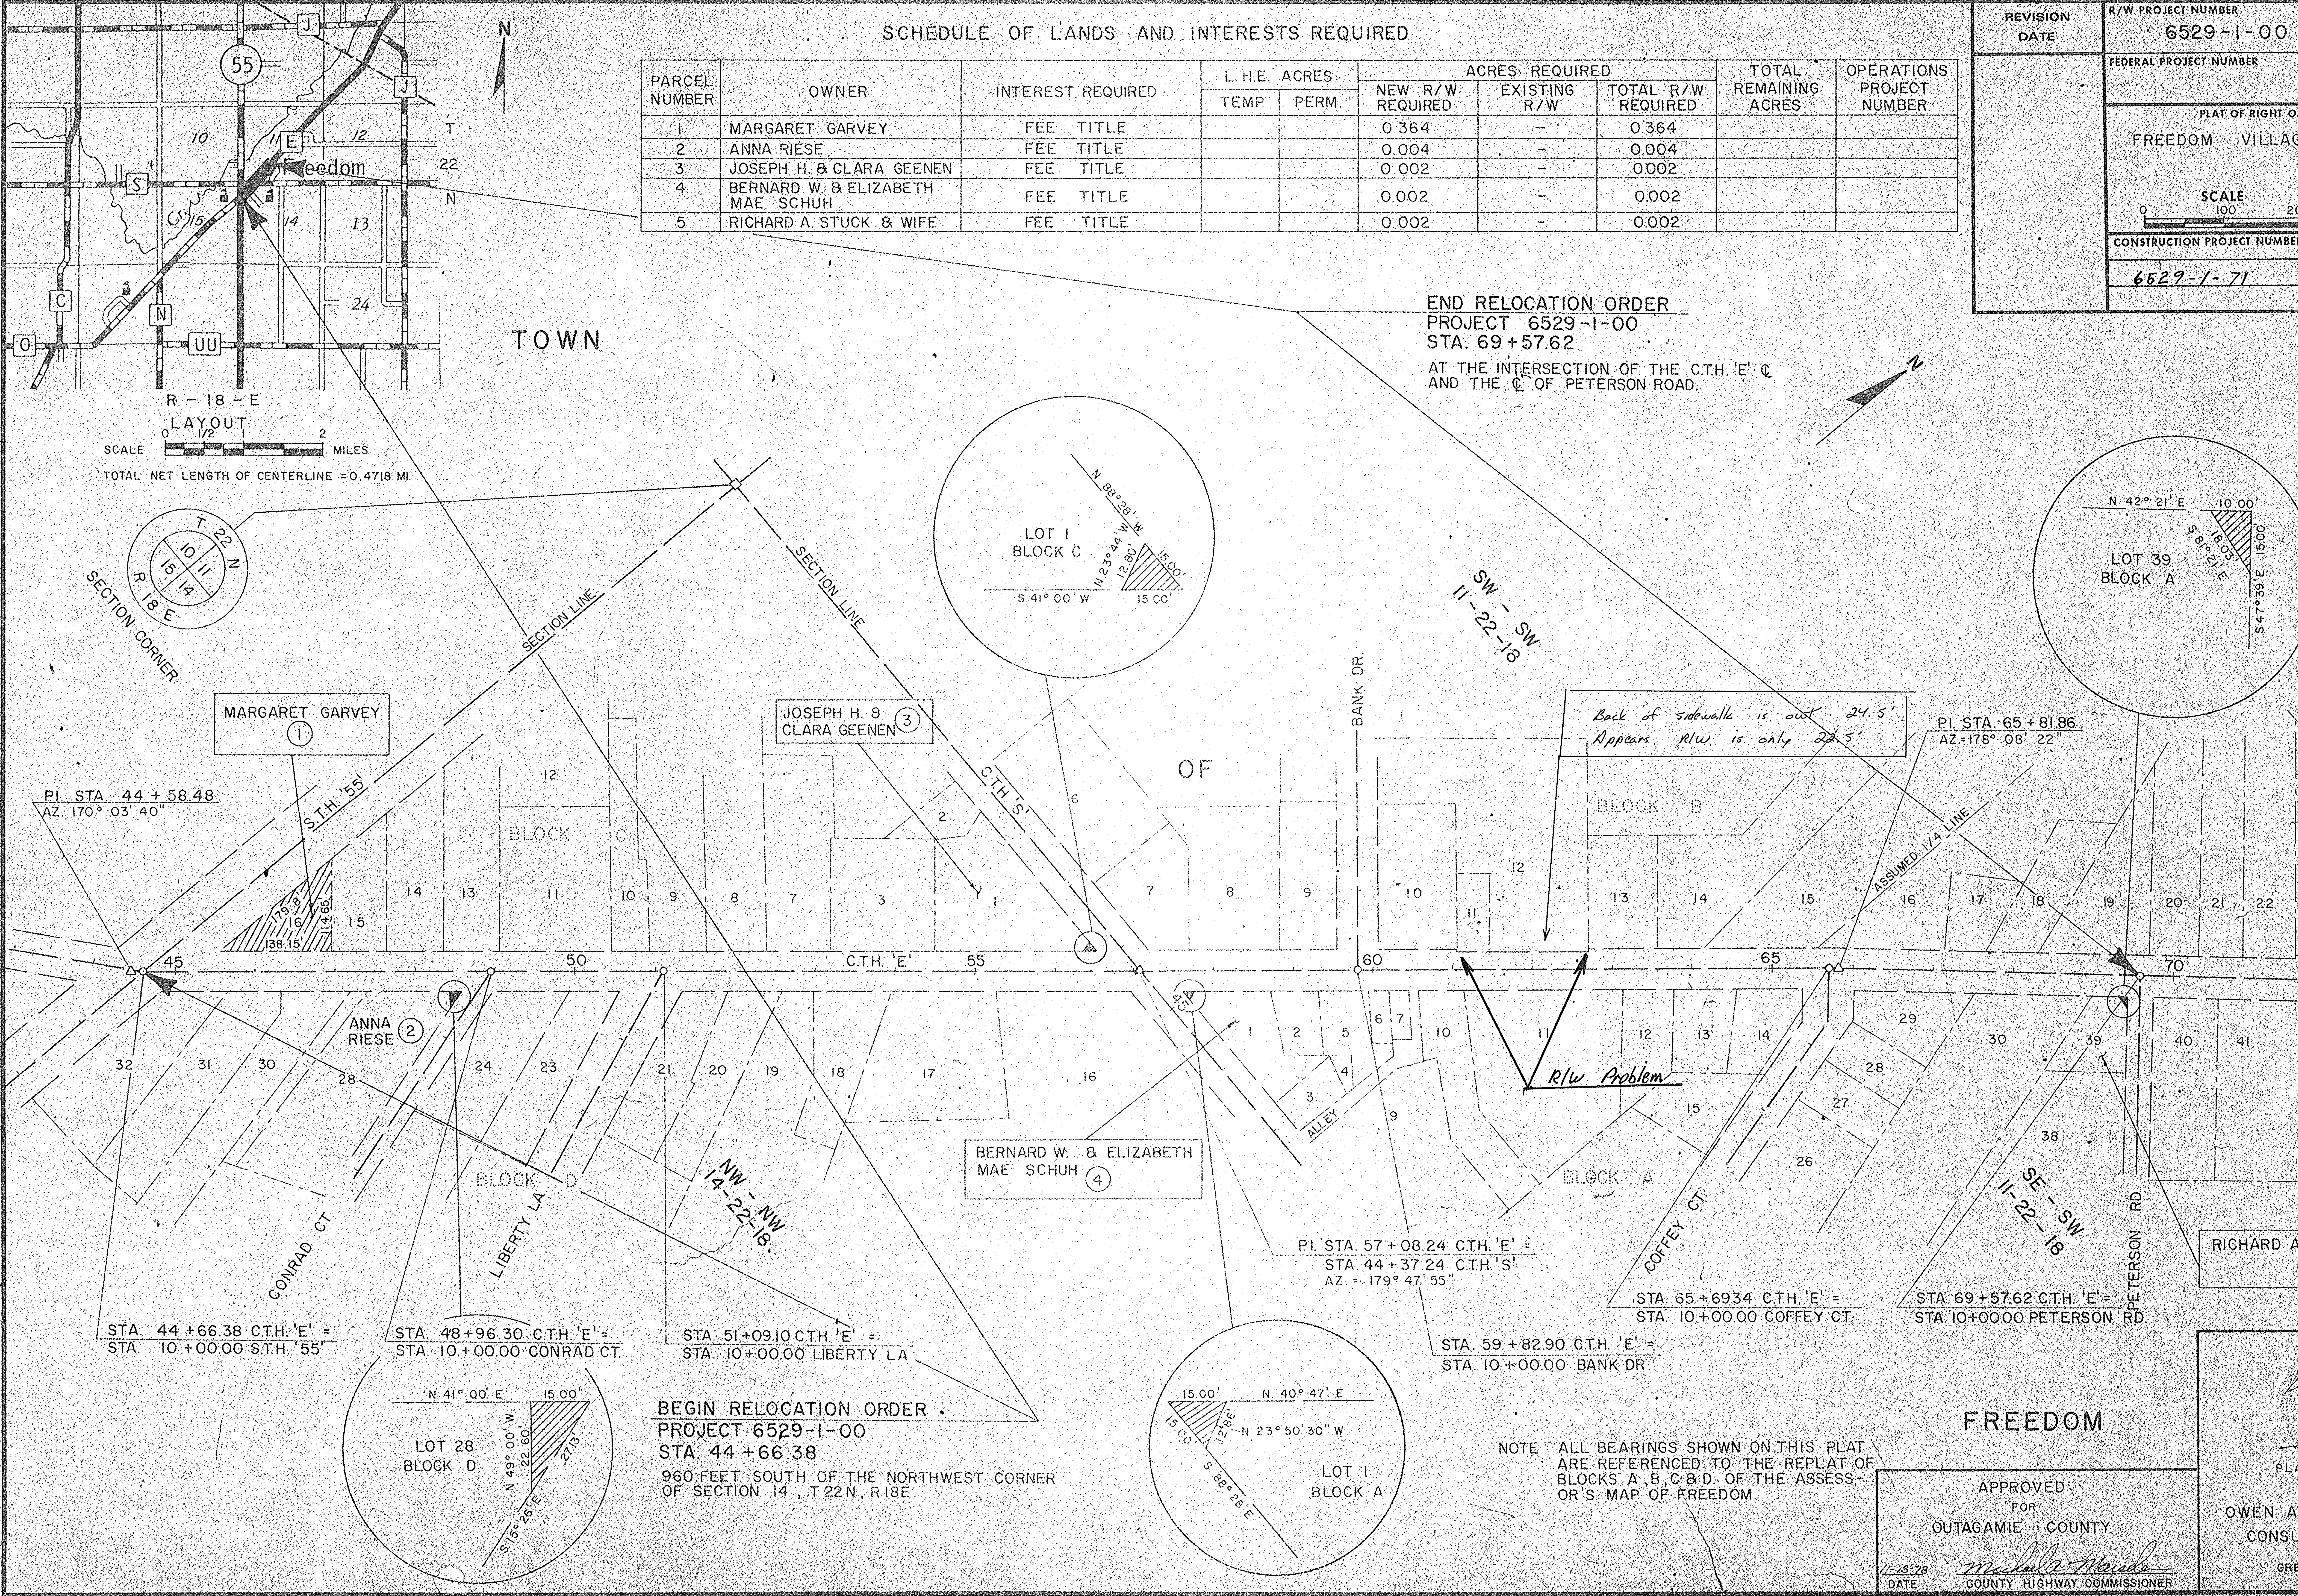

N
55
J
E
S
C
N
O
UU
Freedom
10
11
12
14
13
15
24
T 22 N
R – 18 – E
LAYOUT
SCALE 0 1/2 1 2 MILES
TOWN
OF
FREEDOM
N
T 22 N R 18 E 10 11 15 14
SECTION CORNER
SECTION LINE
SECTION LINE
S.T.H. '55'
C.T.H. 'S'
C.T.H. 'E'
BANK DR.
ALLEY
CONRAD CT
LIBERTY LA
COFFEY CT
PETERSON RD
ASSUMED 1/4 LINE
BLOCK C
BLOCK B
BLOCK D
BLOCK A
SW – SW 11-22-18
NW – NW 14-22-18
SE – SW 11-22-18
45
50
55
60
65
70
179.8'
16
14.65'
138.15'
MARGARET GARVEY ①
ANNA RIESE ②
JOSEPH H. & CLARA GEENEN ③
BERNARD W. & ELIZABETH MAE SCHUH ④
RICHARD A. STUCK & WIFE ⑤
LOT 1 BLOCK C
N 88° 28' W
N 23° 44' W
12.80'
15.00'
S 41° 00' W
15.00'
LOT 39 BLOCK A
N 42° 21' E
10.00'
18.03'
S 81° 21' E
15.00
S 47° 39' E
LOT 28 BLOCK D
N 41° 00' E
15.00'
N 49° 00' W
22.60
27.13'
S 15° 26' E
LOT 1 BLOCK A
15.00'
N 40° 47' E
12.86'
N 23° 50' 30" W
15.00
S 88° 28' E
R/W Problem

TOTAL NET LENGTH OF CENTERLINE = 0.4718 MI.

END RELOCATION ORDER
PROJECT 6529-1-00
STA. 69+57.62
AT THE INTERSECTION OF THE C.T.H. 'E' ℄ AND THE ℄ OF PETERSON ROAD.

BEGIN RELOCATION ORDER
PROJECT 6529-1-00
STA. 44+66.38
960 FEET SOUTH OF THE NORTHWEST CORNER OF SECTION 14, T22N, R18E

P.I. STA. 44+58.48
AZ. 170° 03' 40"

P.I. STA. 57+08.24 C.T.H. 'E' =
STA. 44+37.24 C.T.H. 'S'
AZ. = 179° 47' 55"

P.I. STA. 65+81.86
AZ. = 178° 08' 22"

STA. 44+66.38 C.T.H. 'E' =
STA. 10+00.00 S.T.H. '55'

STA. 48+96.30 C.T.H. 'E' =
STA. 10+00.00 CONRAD CT.

STA. 51+09.10 C.T.H. 'E' =
STA. 10+00.00 LIBERTY LA

STA. 59+82.90 C.T.H. 'E' =
STA. 10+00.00 BANK DR.

STA. 65+69.34 C.T.H. 'E' =
STA. 10+00.00 COFFEY CT.

STA. 69+57.62 C.T.H. 'E' =
STA. 10+00.00 PETERSON RD.

Back of sidewalk is out 24.5'
Appears R/W is only 22.5'

NOTE: ALL BEARINGS SHOWN ON THIS PLAT ARE REFERENCED TO THE REPLAT OF BLOCKS A, B, C & D. OF THE ASSESSOR'S MAP OF FREEDOM

APPROVED
FOR
OUTAGAMIE COUNTY
11-13-78
DATE
COUNTY HIGHWAY COMMISSIONER

PLANS PREPARED
BY
OWEN AYRES & ASSOCIATES
CONSULTING ENGINEERS
GREEN BAY, WISCONSIN

Catalog No. 2130-D1